NITTOSEIKO

Easy installation for Precise application【Supported M1.4 ~ M2】

TORX®

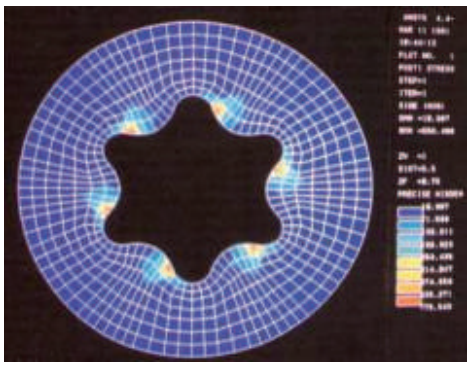

TORX® improves recess stripping of set screws !

Special features

- Good workability even shallow engagement of bit with recess.
- Better torque transmission.
- Eliminate slip of bits.
- Cold headed spherical point offers cost saving.

Dimension Table





Unit : mm

Nom. dia.	Pitch	Drive size	i Min.	e (ref.)	A	L					
						2	2.5	3	4	5	6
1.4	0.3	T-0	0.35	0.2	0.78	○	○	○	○	○	
1.6	0.35	T-1	0.5	0.2	0.88	○	○	○	○	○	
1.7	0.35	T-1	0.5	0.2	0.88	○	○	○	○	○	
2	0.4	T-2	0.6	0.2	0.99		○	○	○	○	○

NITTOSEIKO CO.,LTD.

Fastener Division
Global Sales Section

URL: https://global.nittoseiko.global.nittoseiko.com/

[Website] [Inquiry Form]

IATF16949 JP18/063026

ISO9001 JP17/062866

ISO14001 E0954
*Registered Scope
・Main Factory
・Yata Factory

*Trademarks which attached "®" are registered in Japan and/or other countries.