


Ultra-Thin head
to support lighter & smaller design



LAMIMATE®

LAMIMATE supports lighter & smaller design and tighter fastening.

Supported size is from M2.5 up to M5.

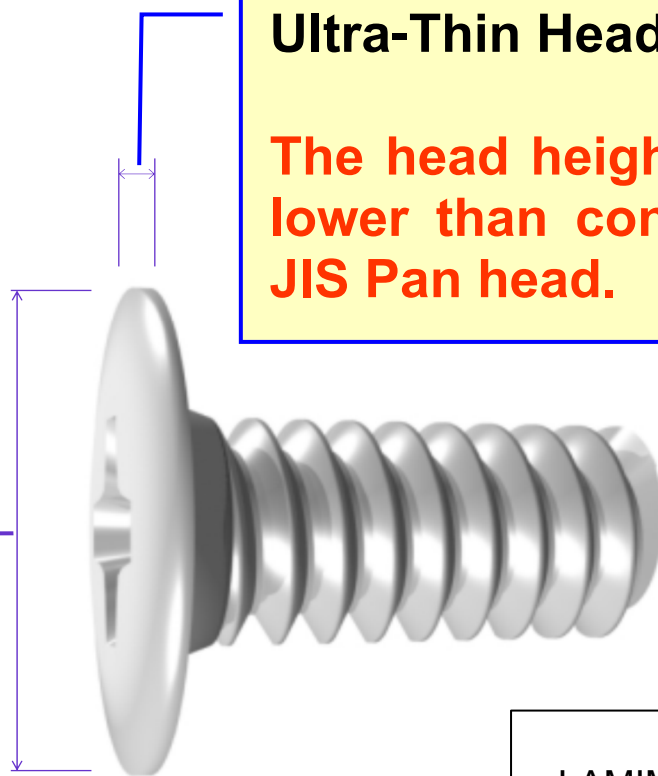

Ultra-Thin Head;

The head height is **35% lower** than conventional JIS Pan head.

Bigger Head Diameter ;
It leads bigger bearing surface, which generates bigger friction and offers;

1. Higher stripping torque,
2. Better loose-proof effects
3. Prevention liner's depression.

LAMIMATE has a reinforcement under the head to secure strength of screw and recess.



NITTO SEIKO CO., LTD.


1-6-4, Honjo-nishi,
Higashiosaka, Osaka,
578-0965,
Japan

Tel : 81-6-6745-8392
Fax : 81-6-6745-8372
E-mail : sales@nittoseiko.co.jp
URL : <http://www.nittoseiko.co.jp/>


LAMIMATE[®] DIMENSION TABLE

MACHINE SCREW

TAPTITE[®]

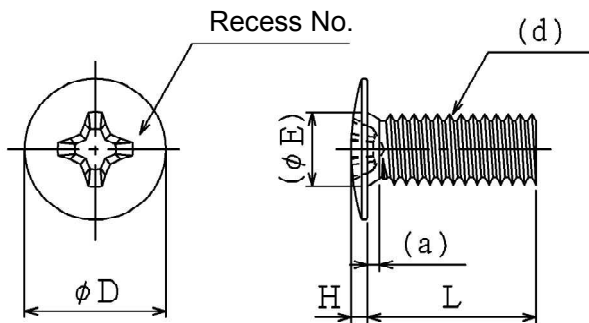

Note: L shall conform to JIS B 1111.

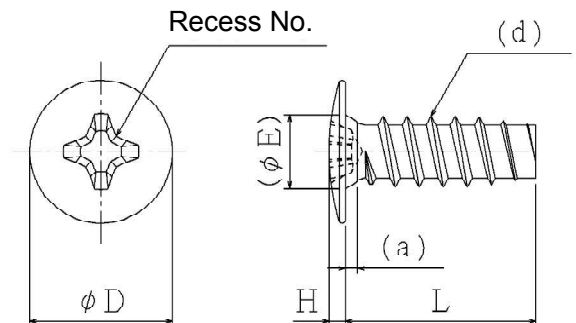

Note : L shall conform to Nitto Seiko Taptite standard

Nom. dia. (d)	D	H	Recess No.	Reinforcement		NITTO SEIKO DRAWING NO.			
	Dim. & Tolerance	Dim. & Tolerance		(E)	(a)	Machine Screw	B-TITE	S-TITE	P-TITE
2.5	5 ⁰ _{-0.5}	0.6 ^{+0.1} _{-0.1}	1	2.5	0.5	S20300	S20305	S20350	S20355
2.6	5 ⁰ _{-0.5}	0.6 ^{+0.1} _{-0.1}	1	2.6	0.5	S20301	S20306	S20351	S20356
3	6 ⁰ _{-0.6}	0.7 ^{+0.15} _{-0.15}	1	3	0.5	S20302	S20307	S20352	S20357
4	8 ⁰ _{-0.6}	0.9 ^{+0.15} _{-0.15}	2	4	0.7	S20303	S20308	S20353	S20358
5	10 ⁰ _{-0.8}	1.2 ^{+0.2} _{-0.2}	2	5	0.8	S20304	S20309	S20354	S20359

When you order, please specify
Nom. dia., Shank length, Nitto Seiko Drawing No. and type of finish.

NITTO SEIKO CO.,LTD.

Trademarks which attached © are registered in Japan and/or other countries.