NITTOSEIKO

Ultra-Thin head to support lighter & smaller design

LAMIMATE

Outline of LAMIMATE

LAMIMATE supports lighter & smaller design and tighter fastening.
Supported size is from M2.5 up to M5.

Ultra-Thin Head;

The head height is 35% lower than conventional JIS Pan head.

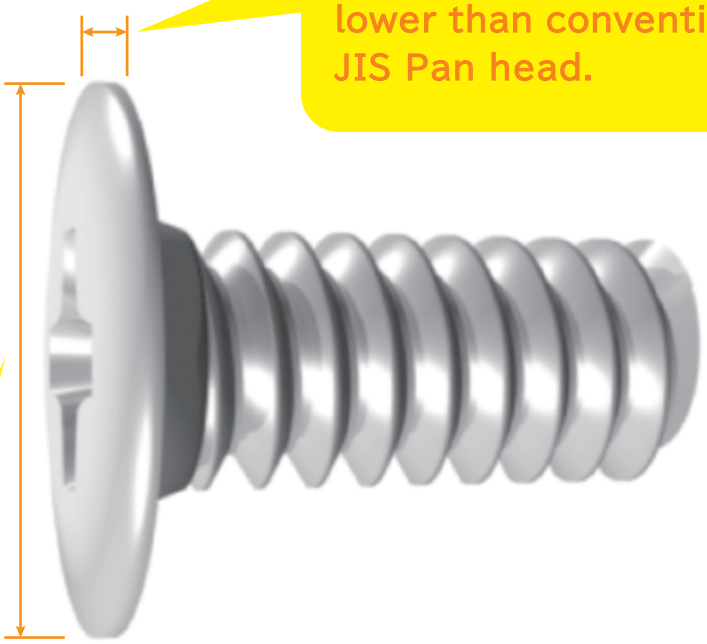

Bigger Head Diameter;

It leads bigger bearing surface, which generates bigger friction and offers;
1. Higher stripping torque,
2. Better loose-proof effects
3. Prevention liner's depression.

LAMIMATE has a reinforcement under the head to secure strength of screw and recess.

NITTOSEIKO

Ultra-Thin head to support lighter & smaller design

LAMIMATE

Dimension table of LAMIMATE

MACHINE SCREW

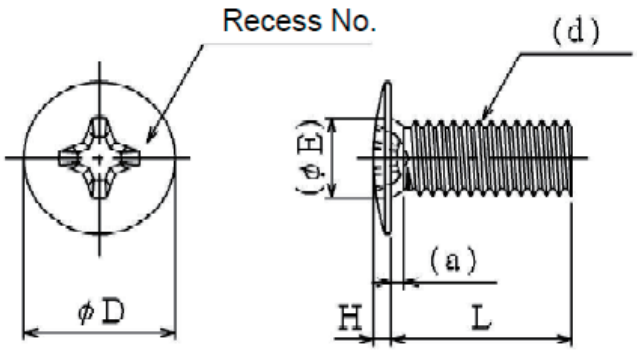

Note:L shall conform to JIS B 1111.

TAPTITE®

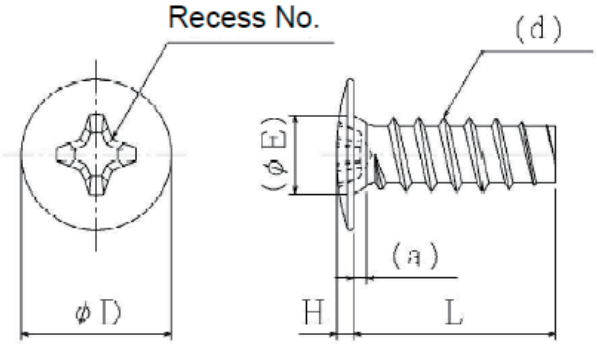

Note:L shall conform to Nittoseiko Taptite standard.

Nom. dia. (d)	D	H	Recess No.	Reinforcement		NITTOSEIKO DRAWING NO.			
	Dim. & Tolerance	Dim. & Tolerance		(E)	(a)	Machine Screw	B-TITE	S-TITE	P-TITE
2.5	5 $^{0}_{-0.5}$	0.6 $^{+0.1}_{-0.1}$	1	2.5	0.5	S20300	S20305	S20350	S20355
2.6	5 $^{0}_{-0.5}$	0.6 $^{+0.1}_{-0.1}$	1	2.6	0.5	S20301	S20306	S20351	S20356
3	6 $^{0}_{-0.6}$	0.7 $^{+0.15}_{-0.15}$	1	3	0.5	S20302	S20307	S20352	S20357
4	8 $^{0}_{-0.6}$	0.9 $^{+0.15}_{-0.15}$	2	4	0.7	S20303	S20308	S20353	S20358
5	10 $^{0}_{-0.8}$	1.2 $^{+0.2}_{-0.2}$	2	5	0.8	S20304	S20309	S20354	S20359

*When you order, please specify
Nom. dia., Shank length, Nittoseiko Drawing No. and type of finish.

NITTOSEIKO CO.,LTD.

Fastener Division
Global Sales Section

URL: https://global.nittoseiko.com/

[Website] [Inquiry Form]

IATF16949 JP18/063026
ISO9001 JP17/062866
ISO14001 E0954
*Registered Scope
·Main Factory
·Yata Factory

*Trademarks which attached "®" are registered in Japan and/or other countries.
*TAPTITE® is a Registered Trademark Licensed by CONTI Fasteners, AG.